




SPECIFICATION SHEET



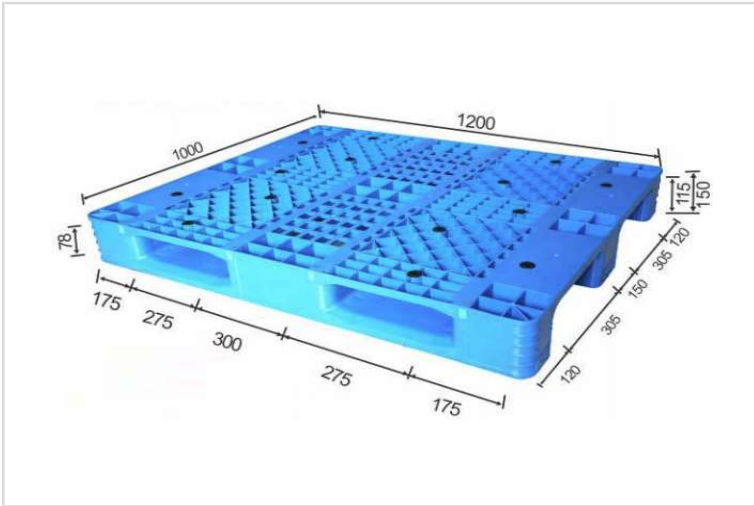

PLASTIC PALLET


MANUFACTURED IN ACCORDANCE WITH:
 ISO 9001:2015 / ISO 14001:2015 / ISO 18001:2007 / ISO 45001:2018

100% RECYCLABLE AT END OF LIFE
 ALL METAL PARTS ARE ZINC PLATED AND THUS CORROSION-RESISTANT

STANDARD COLORS ● 6C ● 293C ● 355C ● 431C ● 186C ● 123C

PRODUCT INFO		
SKU	(1210WHF)-VD-3R-OTI-1210	
DESCRIPTION	3 RUNNERS VENTED DECK PLASTIC PALLET	
DIMENSIONS (±5%)	120 X 100 X 15 CM	
RUNNERS	3 LONGITUDINAL / 0 TRANSVERS	
MANUFACTURING METHOD	ONE TIME INJECTION	
MATERIAL	HIGH DENSITY POLYETHYLENE (HDPE)	
TEMPERATURE RANGE	(-40 TO 70) C°	
TARE WEIGHT (±5%)	13.2 KG	
LOADING CAPACITY	STATIC 4000 KG / DYNAMIC 1000 KG / RACKING 500 KG	
REINFORCEMENT	AVAILABILITY	✓
	REINFORCED WITH	GALVANIZED STEEL BARS
	MAXIMUM	10 BARS
	WEIGHT RANGE	(8.0 - 11.0) KG
	LOADING CAPACITY	STATIC 6000 KG / DYNAMIC 2000 KG / RACKING 1600 KG
RIMS AVAILABILITY		
RFID SLOT	✓	

ENTRY	
 2-WAY	 4-WAY

CONTAINER LOADING		
	20FT	214
	40HQ	510
SHIPPING PORT	SHANGHAI	

OPTIONAL REQUESTS
SILK SCREEN